

Tropical Storm Arthur - Storm Report

October 3, 2026

1 Observations of The Regulus Project

Focus: Historical Audit: 2026-06-15 00:00:00 to 2026-06-20 0:59:59

1.1 Recorded Observation Highlights

Observations from 2026-06-15 00:00:00 (UTC) to 2026-06-20 0:59:59 (UTC)

Min Pressure 997.65 mb

Max Pressure 1004.25 mb

Max Wind Speed 43.22 mph

Total Rainfall 4.79 in



1.2 Executive Summary



Tropical Storm Arthur impacted the facilities envelope in a variety of ways. Likewise, it impacted a significant portion of the general public across the United States of America.


1.3 Meteorological Context

Arthur began impacting the air column surrounding the facility on 6-15-2026 while it was still a developing storm off in the gulf. On 6-17-2026, atmospheric degradation was at its peak. Diurnal cycles were clearly disrupted late on the evening of the 15th. As the rain fell, there was an obvious elevation in pressure for the duration of the rainfall.

Note: Barometric Pressure data is not comprehensive. It includes data around the gaps. (End of day on 6-18-2026 was not captured. This was when the storm actually hit the envelope. The outage in station monitoring was not related to the storm.)

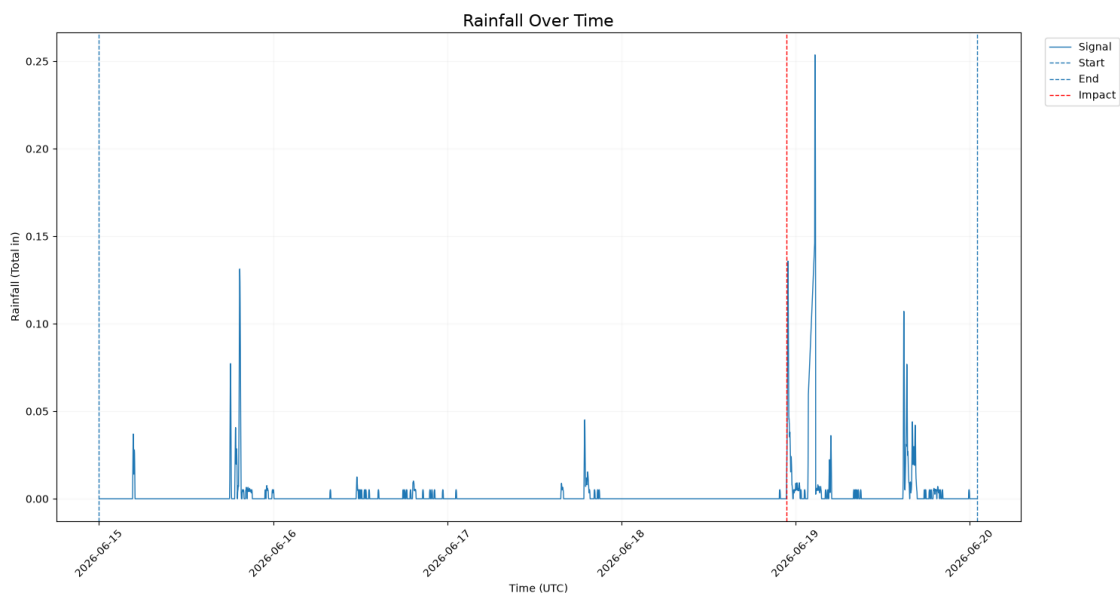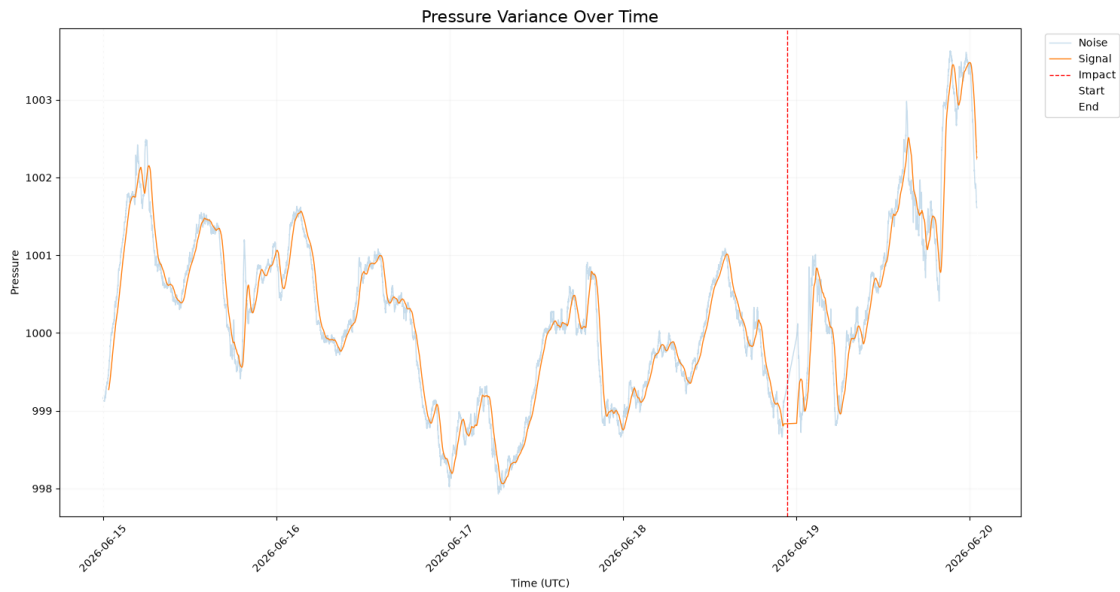

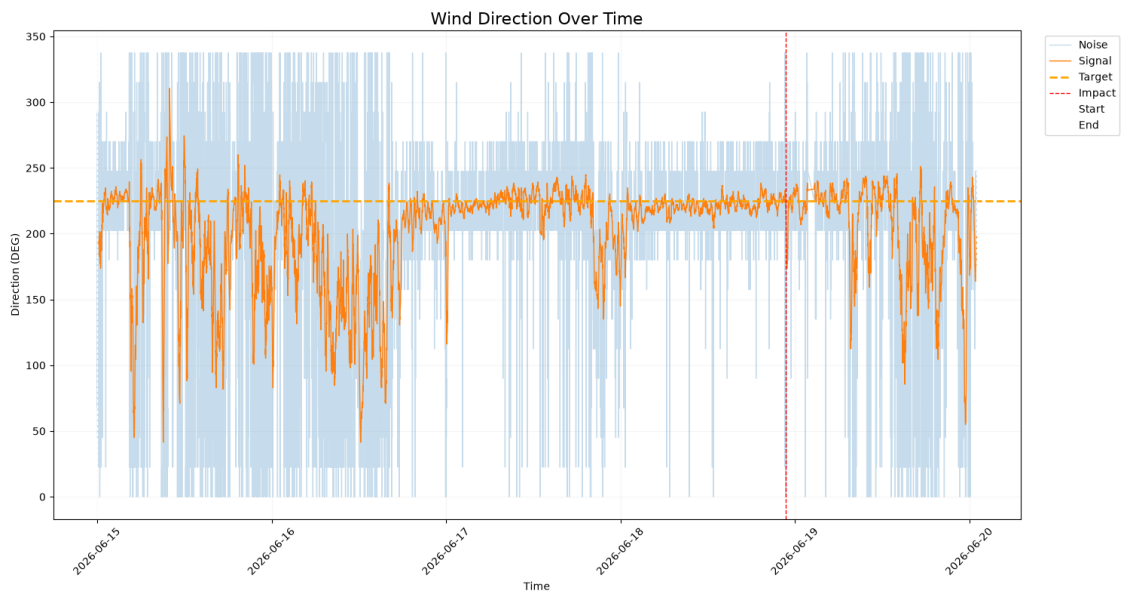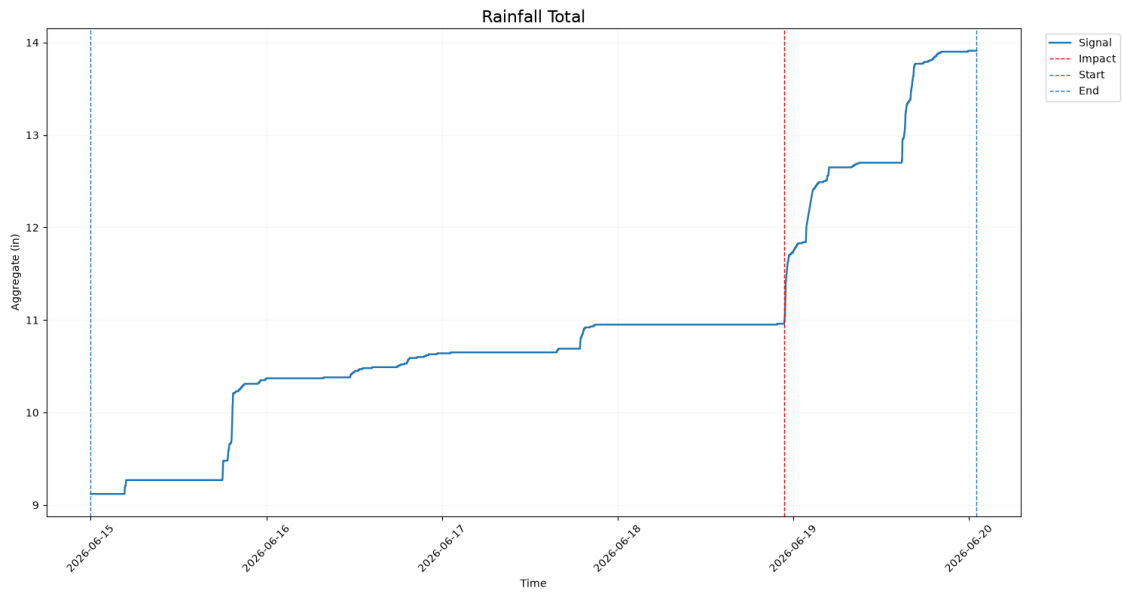

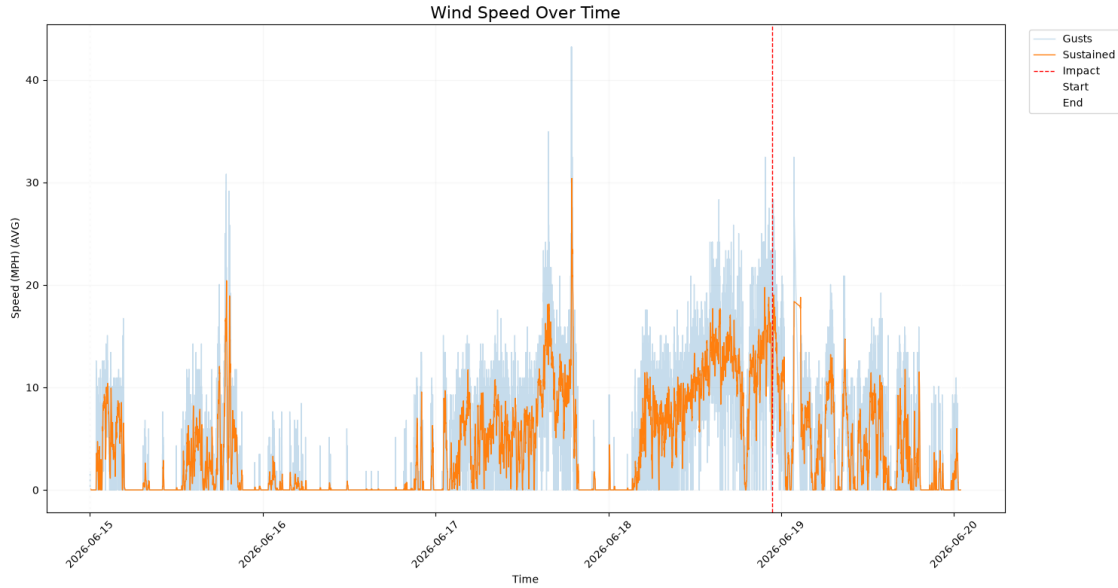

1.4 Envelope Impact Assessment

- **Wind Exposure:** Maximum recorded sustained wind speed: 43.22 mph. (6-17-2026, Polaris)
 - Assessment: Mild wind, no damage expected from wind.
- **Envelope Damage:** Mild water damage to the basement walls.
- **Water Impacts:**
 - Noticeable water intrusion in the basement through walls. Potential causes include heightened water table near the west wall or air infiltration through crawlspace access.
 - Significant humidity anomalies detected the basement area (Elevated from 30% baseline to sustained nearly 50% during rainfall events.)
 - Attic humidity anomalies detected (As temperature rises, humidity in the attic also continues to rise. That is not expected within an envelope. Unusual spikes indicate a potential incomplete interior vent emitting moisture directly into the attic. Will continue to investigate.)
- **Temperature Impacts:**
 - Continuing to see warmth infiltration through the Bay windows and the fireplace. (Primarily the bay windows are the suspect as humidity was primarily unmoved in that room)
 - Wild fluctuations in temperature detected.

1.5 Equipment and Accuracy Assessment

Through the duration of the event, there was potential clock drift and significant power related anomalies related to the Icarus station. The solar panel did not receive sufficient sunlight to recharge the internal battttery for that station.

Accuracy between 6-18 and 6-20 was not verified or viewable live and devices ran without communicating with critical infrastructure between those dates.

1.6 Architects Post-Mortem Statement

“Overall, we were able to capture some high value telemetry from this storm system. Ultimately the infrastructure began degrading just before impact; however, most of the stations continued to capture storm data. I am looking forward to what the next storm sstem brings – and more importantly, the Regulus Project is in a much better position to capture the next event.” - Charles Harding

1.6.1 Disclaimer

This report was generated based on data obtained by The Regulus Project in 2026. It is solely for scientific research purposes and is not an authoritative truth. The data within this report are the observations reported by the station mesh.

© 2026, Charles Harding

This report was re-compiled on October 2nd 2026 for printability. The data and text content remains the same.